



## Rotating Module - Horizontal Axis DMHe 200

Max. tilting torque 800 Nm, max. torque 120 Nm  
 electrically operated



### Advantages

- Rotating in both directions
- Auto stop
- Low-backlash gear
- Self-locking in any position
- Compact design
- Sturdy design
- Convertible
- Ergonomic working
- Safe and quick handling in assembly processes
- Long service life
- Checked in compliance with DIN EN 1570 with quadruple static overload

### Principal use

- Assembly of automotive parts
- Motor assembly
- Gear assembly
- Pump construction

### Operation

The module is operated with touch control by means of an optionally available hand panel or foot switch with two push-buttons. It can safely stop in every angular position. An automatic stop is preset at all 90° positions.

The zero position of the automatic stop can be preset to any position by pushing both push-buttons.

### Installation

The rotating module has a *modulog* interface 140 x 140 mm and can be mounted by 4 screws M10 onto a fixture or another module. The power supply is made by the separately available switching power supply. The electronic control is integrated.

### Description

Rotating modules are used in assembly and handling processes to transform electrical energy into a rotating movement.

When using the rotating module, component parts can be rotated rationally, quickly and safely and can be assembled ergonomically from all sides.

The strongly reduced worm gear allows high holding torques in standstill.

The double-bearing drive shaft compensates high axial and radial forces.

The rotating module is designed for a long service life. The electronically commutated DC motor is virtually wear-free.

The mechanical components and sealing elements are designed for 1,000,000 indexing cycles within the indicated load limits.


The rotating modules – horizontal axis and vertical axis (data sheet M 3.201) are nearly identical in construction, thus the axis alignment can be retrofitted for very different applications.

### *modulog*

## Rotating module – horizontal axis

### DMHe 200

Part-no. 6508-02-36-E



### Technical characteristics

Max. load:	2,000 N
Max. tilting torque:	800 Nm
Max. torque:	120 Nm
Max. holding torque:	350 Nm
Angle of rotation:	360°
Rotation:	any
Index:	90° standard optionally 45°/60°/180°

### Operations

- Foot switch
- Hand panel



### Combinable with the modules

#### Lifting modules

- Range as per data sheet M 4.201 and M 4.202
- ShopFloor as per data sheet M 4.301
- Strong as per data sheet M 4.401



### *modulog* interfaces

- Flange plate: 140 x 140 - M10
- Body: 140 x 140 - M10


### Accessories

- Power supply **Part-no. 3822-322**
- Hand panel **Part-no. 3823-025**
- Foot switch **Part-no. 3823-038**  
as per data sheet M 8.200

# Technical characteristics

## Dimensions

### Dimensions

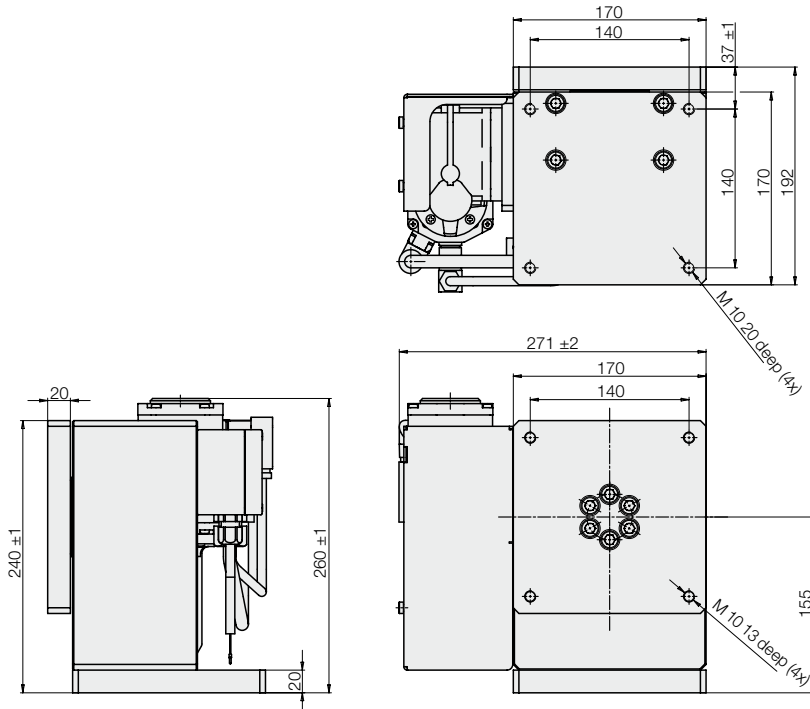

### Technical characteristics


Max. total $F_x/F_y$	[N]	2,000
Max. $F_z$	[N]	1,000
Max. driving torque $M_z$	[Nm]	120
Max. holding torque $M_z$	[Nm]	350
<b>Max. total of all torques <math>M_x/M_y/M_z</math></b>	<b>[Nm]</b>	<b>800</b>
Max. cycle time (ED)	25%, 60s On	
Code class	IP54	
Current consumption	[A]	6...16
Max. admissible current consumption	[A]	20
Supply voltage	[V DC]	24-30

Adjust the speed of rotation by trimming potentiometer 2.5 to 7.5 rpm.

Adjust the indexing angles 45, 60, 90 and 180 degree by trimming potentiometer.

Adjust the soft stops by trimming potentiometer.

### Maximum admissible load

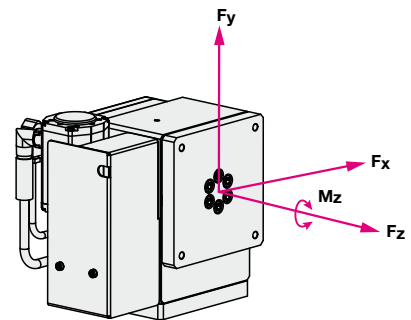

### Maximum admissible forces:

$F_x = \pm 2,000$  N

$F_y = \pm 2,000$  N

$F_z = \pm 1,000$  N

### Maximum admissible torques:

$M_x$  or  $M_y = 800$  Nm

$M_z = 350$  Nm (in standstill)

The total of all occurring forces or torques must not exceed the highest single value.

The rotating module is checked in compliance with DIN EN 1570 with quadruple static overload.